



**HIGH
RATE
MAX^{XT}**



UPS12-100MRX

Valve Regulated Lead Acid Battery

Designed for UPS Standby Power Applications

FEATURES AND BENEFITS


APPLICATIONS

- Data Centers
- Network Operation Centers
- Industrial Process Control Facilities
- Internet Housing Sites
- Semiconductor Manufacturing
- Banks and Financial Markets
- Power Generation Plants
- Hospital and Testing Laboratories
- Emergency Response Center

- 12 year design life @ 25°C
- Eurobat classification: Long life
- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance.
- 3 Year Warranty (refer Dynasty warranty card, 41-9027)
- Patented Long Life Alloy having the lowest calcium levels in the industry - minimizing grid growth, reducing gassing, and extending battery life
- Patented UL Recognized Flame-arresting vents in each cell for safety and long life.
- Designed with the same recombination, thermal runaway prevention, gassing and flame retardant characteristics of the Bellcore 4228 compliant Dynasty Telecom products.
- Flame retardant polypropylene case and cover compliant with UL94V-2
- Proprietary Fixed Orifice Plate Pasting technology applying active materials on both sides of the grid for consistent cell-to-cell performance, higher capacity and uniform grid protection.
- Thermally welded case-to-cover bond to eliminate leakage
- Can be operated in upright, side or end mounting orientation.
- Not restricted for air transport -Complies with IATA/ICAO Special Provisions A67.
- Not restricted for surface transport - Classified as non-hazardous material as related to DOT-CFR Title 49 parts171-189
- Not restricted for water transport - Classified as non-hazardous material per IMDG Amendment 27.

Specifications

Cells Per Unit	Voltage Per Unit	Weight	Watts/Cell @ 15min	1 Min Current to 1.75VPC	IEC Short Circuit Current	IEC Resistance
6	12V	10.7 Kg	100	171 Amps	1003 Amps	12.35 (mOhms)

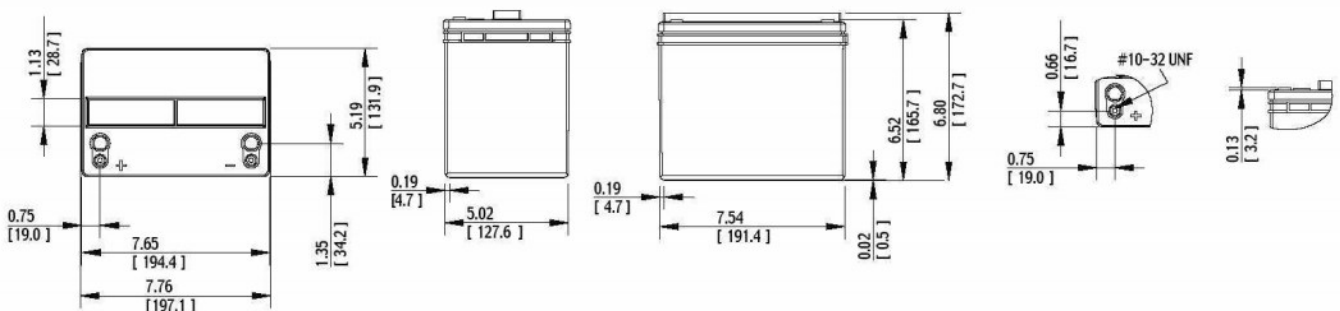

*All dimensions in inches and (millimeters). All dimensions are for reference only. Contact a C&D Representative for complete dimensional information.

Specifications

Operating Temperature Range with temperature compensation	Discharge: -40° F (-40° C) to +160°F (71°C) Charge: -10°F (-23°C) to +140°F (60°C)
Nominal Operating Temperature Range	+74° F (23°C) to +80°F (27°C)
Recommended Maximum Charging Current Limit	C/5 amperes @ 20hr rate
Float Charging Voltage	13.65 ± 0.15 VDC average per 12V unit
Maximum AC Ripple (Charger)	0.5% RMS or 1.5% P-P of float charge voltage recommended for best results. Max voltage allowed = 1.4% RMS (4% P-P) Max current allowed = C/20
Self Discharge	Battery can be stored up to 6 months at 77° F (25°C) before a freshening charge is required. Batteries stored at temperatures greater than 77°F (25°C) will require recharge sooner than batteries stored at lower temperatures. See C&D brochure 41-7272, Self-Discharge and Inventory Control for details.
Equalize charge and cycle service voltage	14.40 to 14.80 VDC average per 12V unit @ 77° F (25°C)
Terminal	Threaded copper alloy insert terminal to accept #10-32 UNF bolt
Terminal Hardware Initial Torque	30 in.-lbs. (3.4 N-m)

Constant Power Discharge Table - Watts Per Cell @ 25°C (77°F)

Operating Time to End Point Voltage

EPV	5 min	10 min	15 min	20 min	25 min	30 min	45 min	60 min	90 min	2 hr	3 hr	4 hr	5 hr	8 hr	10 hr	12 hr	20 hr
1.85	142.5	105.3	86.4	72.7	63.6	57.0	44.2	36.9	27.4	22.2	15.9	12.6	10.5	7.2	5.9	5.0	3.2
1.80	157.1	117.1	95.2	79.3	68.8	61.3	47.0	39.0	28.6	22.9	16.5	13.0	10.9	7.4	6.1	5.2	3.3
1.75	165.8	126.4	99.5	82.8	71.8	63.9	48.6	40.0	29.0	23.1	16.6	13.2	11.0	7.5	6.2	5.3	3.4
1.70	172.2	131.0	103.3	85.5	73.7	65.4	49.4	40.5	29.3	23.3	16.7	13.3	11.1	7.5	6.2	5.3	3.4
1.67	176.1	133.3	105.7	87.1	74.9	66.3	49.9	40.8	29.4	23.4	16.8	13.3	11.1	7.5	6.2	5.3	3.4
1.65	178.8	135.8	107.3	88.2	75.7	66.9	50.2	41.0	29.6	23.4	16.8	13.3	11.1	7.6	6.2	5.3	3.4

Constant Current Discharge Table - Amps @ 25°C (77°F)

Operating Time to End Point Voltage

EPV	5 min	10 min	15 min	30 min	60 min	90 min	2 hr	3 hr	4 hr	5 hr	6 hr	7 hr	8 hr	10 hr	12 hr	20 hr	24 hr
1.90	68.2	52.4	42.2	28.4	18.2	13.2	10.5	7.5	5.9	4.9	4.2	3.7	3.3	2.7	2.3	1.5	1.3
1.85	80.0	61.1	48.5	31.4	20.1	14.4	11.4	8.2	6.4	5.4	4.6	4.0	3.6	2.9	2.5	1.6	1.4
1.80	88.6	68.0	53.7	33.6	21.0	15.1	11.9	8.5	6.7	5.6	4.8	4.2	3.7	3.1	2.6	1.7	1.4
1.75	93.3	71.3	56.3	34.9	21.5	15.4	12.1	8.6	6.8	5.7	4.9	4.3	3.8	3.1	2.6	1.7	1.4

Note: Batteries to be mounted with 0.5 in. (1.25 cm) spacing minimum and free air ventilation. Specifications subject to change without notification.